


## Typical Quick-lube Installation

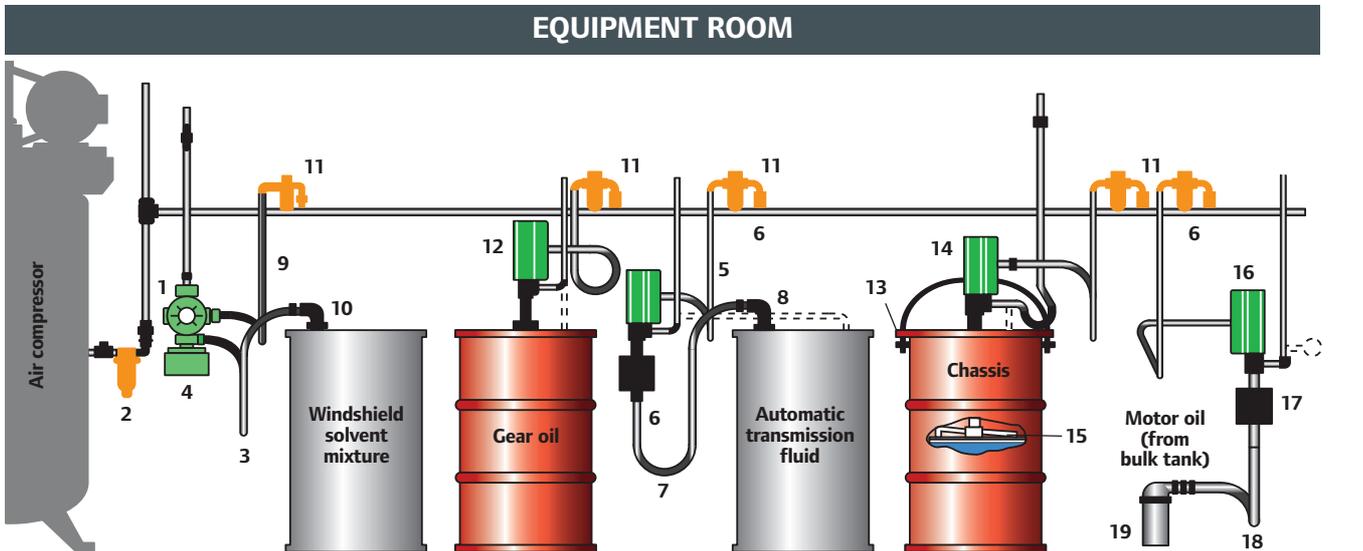

1. Pump: PD05P-ARS-PTT-B
  2. 1/2" (12.7 mm) air line filter: F25241-110
  3. 1/2" (12.7 mm) material hose: 623501-5
  4. Wall-mount bracket: 76763
  5. Pump: LM2305A-11-B
  6. Wall-mount bracket: 61113
  7. 1-1/2" (38.1 mm) ID material hose (by others)
  8. Siphon tube assembly: 66779 with 1-1/2" (F) x 1" (38.1 mm x 25.4 mm) reducing bushing
  9. 1/4" (6.3 mm) ID air hose: 622201-3
  10. Siphon tube assembly: 61409
  11. Air line filter / regulator: P29221-610 (gauge included)
  12. Pump: LM2305A-41-B 55-gal service (208.2 L)
  13. Single-post lift: 640067 400-lb service (181.4 kg)
  14. Pump: LP3005-1 400-lb service (181.4 kg) LP3002-1 120-lb service (54.4 kg)
  15. Follower plate assembly: 640015-1 400-lb service (181.4 kg) 640165 120-lb service (54.4 kg) (included with LP3002-1)
  16. Pump: LM2305A-11-B
  17. Wall-mount bracket: 61113
  18. 1-1/2" (38.1 mm) ID material hose: (by others)
  19. 1" (25.4 mm) pipe swivel union: 75368 with 1-1/2" (F) x 1" (M) (38.1 mm x 25.4 mm) reducing bushing
- High-pressure relief valve kit: 61118

### Windshield solvent, automatic transmission fluid, antifreeze

An excellent delivery pump for all types of fluids, the Ingersoll Rand / ARO 1/2" (12.7 mm) diaphragm pump is the best-selling diaphragm pump in the country – and it's covered by a 5-year warranty.

Model PD05P-ARS-PTT-B  
1:1 ratio  
13 gpm (49.1 l/m)  
(free flow)



### Motor/gear oil, automatic transmission fluid

This reliable, hard-working pump comes complete with air coupler and connector, plus a 2" (50.8 mm) bung adapter.

Model LM2305A-41-B  
5:1 ratio  
3" (76.2 cm) air motor  
9 gpm (34.0 l/m)  
(free flow)



### Chassis

Designed for high-pressure delivery of grease, the pump will handle your toughest chassis lube needs. Comes with air / material hose plus drum cover.

Model LP3005-1  
50:1 ratio  
3" (76.2 cm) air motor  
7.5 pounds per minute (3.4 kg/min)  
(free flow)



### Waste oil

The Ingersoll Rand / ARO 1" (25.4 mm) diaphragm pump's simple design will provide years of trouble-free waste oil handling. All of our diaphragm pumps are covered by a 5-year warranty for an extra measure of user security.

Model 666100-3C9-C  
1:1 ratio  
35 gpm (132.4 l/m)  
(free flow)

