


1/2" Non-Metallic Models Pro-Series Pumps

1/2" Non-Metallic Performance Specifications

Ratio:	1:1	
Maximum Flow:	14.4-g.p.m. (54.5-l.p.m.)	
Displacement per cycle:	.039-Gallons (.15-Liters)	
Air Inlet: (Female)	1/4 - 18 P.T.F. SAE Short	
Fluid Inlet:	1/2 - 14 N.P.T.F. - 1	
	Rp 1/2 (1/2 -14 BSP, parallel)	
Fluid Outlet:	1/2 - 14 N.P.T.F. - 1	
	Rp 1/2 (1/2 -14 BSP, parallel)	
Max. operating pressure:	100-psi (6.8-bar)	
Suspended solids max. dia.:	3/32" (2.4-mm)	
Weight: lbs (kg)	PD05P-XDS-XXX-B	6.3 (2.9)
	PD05P-XES-XXX-B	6.7 (3.0)
	PD05P-XKS-XXX-B	6.8 (3.1)
	PD05P-XLS-XXX-B	7.2 (3.3)
	PD05P-XPS-XXX-B	5.2 (2.4)
	PD05P-XRS-XXX-B	5.4 (2.5)

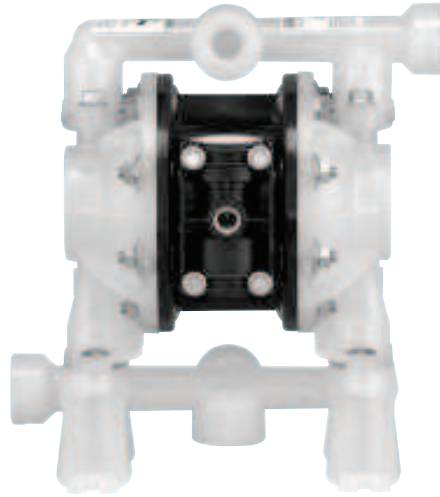

Maximum dry suction lift: ft (m) 15.0 (4.5)

Ordering Menu

PX05	P	-	X	X	S	-	X	X	X	-	BXX
Model Series	Center Section Material		Fluid Connection	Fluid Caps/ Manifold Material	Hardware Material		Seat Material	Ball Material	Diaphragm Material		Specialty Code
D Standard E Remote Actuation Capable	P Polypropylene		A 1/2" N.P.T. B 1/2" BSP	D Groundable Acetal (single port) E Groundable Acetal (multiple port) K PVDF (single port) L PVDF (multiple port) P Polypropylene (single port) R Polypropylene (multiple port)	S Stainless Steel		D Acetal K PVDF P Polypropylene S Stainless Steel	A Santoprene C Hytrel* G Nitrile S Stainless Steel T PTFE U Polyurethane V Viton	A Santoprene C Hytrel* G Nitrile T PTFE/ Santoprene U Polyurethane V Viton		B Standard BOS Remote Actuation Capable**

* Hytrel replaces Nitrile producing superior chemical compatibility and diaphragm life

Accessories

Air Line Connection Kit* | Kit No. 66073-1

Kit includes Piggyback Filter/Regulator with gauge, pipe nipple and a 5-foot section of air hose.

Exhaust Threaded Muffler Kit | Kit No. 637438


Service Repair Kits | Kit No. 637428 (air section)

Kit No. 637427-XX (fluid section)

Wall Mount | 76763

*Please note pumps are not included with these kits.

** See options on page 51

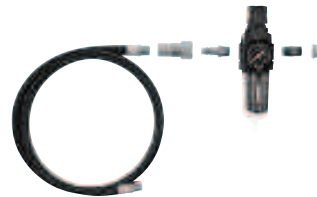

Air Line Connection Kit
66073-1