


TORQUE CONTROL SCREWDRIVERS

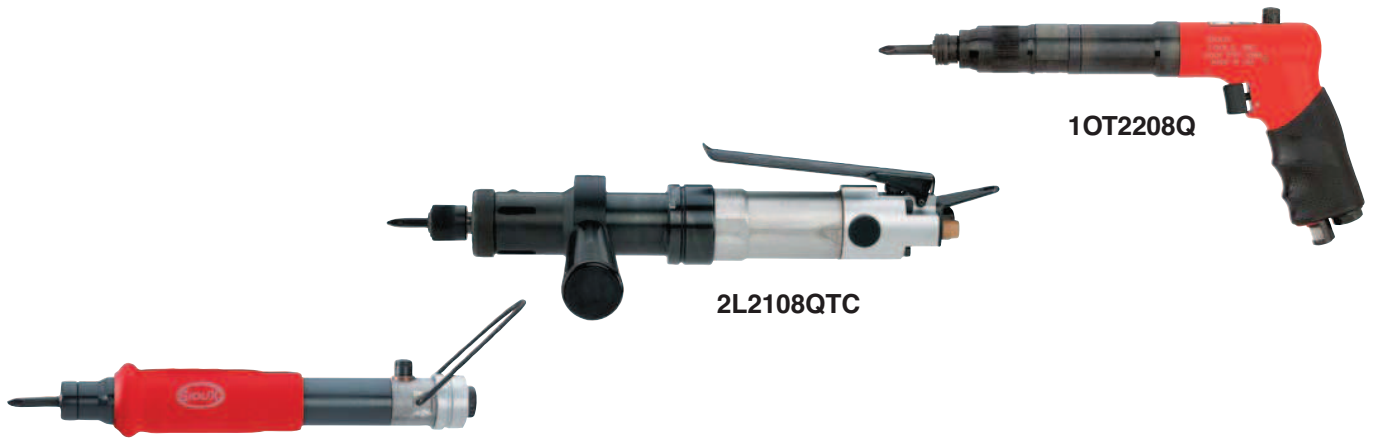

1ST2108

Performance:

Torque: 5.0 in. lb (0.6 Nm) - 200 in. lb (22 Nm)
 Speed: 300 rpm - 2800 rpm

Features:

Push-to-Start and Lever Start
 Reversible
 Locking Button Reverse
 External Clutch Adjustment



Torque Control Screwdrivers

Model Number		Torque Range (Soft Joint)		Free Speed	Weight		Length		Side To Center		Air Consumption		Sound Level
1/4" Quick Change	1/4" Internal Hex	in. lb	Nm	rpm	lb	kg	in.	mm	in.	mm	cfm	l/s	dB(A)
Inline - Push To Start													
1ST2508Q		5.0-14	0.6-1.5	2800	1.4	0.6	8.3	211	0.6	15	8	4	75
1ST2308Q		5.0-25	0.6-3.0	1500	1.6	0.7	9.3	236	0.6	15	8	4	75
1ST2208Q		5.0-35	0.6-4.0	1100	1.6	0.7	9.3	236	0.6	15	8	4	75
1ST2108Q	1ST2108	5.0-50	0.6-5.5	800	1.6	0.7	9.3	236	0.6	15	8	4	75
Inline - Lever Start - Reversible													
2L2308QTC		30-96	3.5-11	900	3.7	1.7	12.1	307	1.0	25	28	13	80
2L2108QTC		60-200	7.0-22	300	3.7	1.7	12.1	307	1.0	25	28	13	80
Pistol Grip - Push To Start													
1OT2508Q		5.0-14	0.6-1.5	2600	1.9	0.9	7.8	200	0.7	17	10	5	75
1OT2308Q		5.0-25	0.6-3	1400	2.1	1.0	8.8	225	0.7	17	10	5	75
1OT2208Q		5.0-35	0.6-4	1000	2.1	1.0	8.8	225	0.7	17	10	5	75
1OT2108Q		5.0-50	0.6-5.5	725	2.1	1.0	8.8	225	0.7	17	10	5	75

General:

Air Inlet Size: 1/4" NPT • Recommended Hose Size: 1/4" (6 mm) (1OT, 1ST series) • Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment:

Parts List • Safety and Instruction Manual • Comfort Grip (1OT, 1ST series) • Suspension Bail (Inline models)

Accessories:

Screwdriver Accessories, see page 48

Screwdriver Bits and Finders, see page 60



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1